

## ASTM D3034 / ASTM F679 SEWER PIPE MANUFACTURER'S CERTIFICATION

This is to certify the pipe manufactured by Sandersons Pipe meets or exceeds the applicable engineering standards listed below for 4" through 24" Sewer Series pipe.

### Materials

Comply with ASTM D1784 for cell classification 12454.

Additional labeling on the SDR 26 and PS 115 sewer series includes the words: "Heavy Wall Sewer Pipe".

### Dimensions/Testing

All pipe sizes 4" through 15" meets or exceeds the performance requirements listed in the current version of ASTM D3034.

### Joints

Integral bell joint system conform to ASTM D3212.

18" through 24" pipe meets or exceeds the performance requirements listed in the current version of ASTM F679.

### Gaskets

All gaskets used in the manufacturing of the pipe comply with ASTM F477 standards.

### Markings on the Pipe

4" through 15": Identification of nominal pipe size, cell classification, SDR class, ASTM designation D3034, material code, manufacturer's name and code.

### Color

Gasketed sewer pipe is green. Solvent weld sewer pipe is available in green or white.

18" through 24": Identification of nominal pipe size, cell classification, pipe stiffness designation (PS series), ASTM designation F679, material code, manufacturer's name and code.

### Length

Gasketed sewer pipe is manufactured in 14' lay lengths. Solvent weld sewer pipe is available in 10' or 20' over-all length.



## ASTM D3034 Gasketed Sewer Pipe


Pipe Size	Outside Diameter (A)	Minimum Wall (B)		*Bell Length (C)	*Insertion/ Reference Mark (D)	Approximate Bell OD Clearance (E)
		SDR35	SDR26			
4"	4.215"	0.120"	0.162"	4.00"	3.50"	5.250"
6"	6.275"	0.180"	0.241"	5.00"	4.25"	7.500"
8"	8.400"	0.240"	0.323"	5.50"	5.00"	9.875"
10"	10.500"	0.300"	0.404"	6.50"	6.00"	12.375"
12"	12.500"	0.360"	0.481"	7.00"	6.50"	14.625"
15"	15.300"	0.437"	0.588"	7.50"	6.50"	18.000"

\*May vary up to  $\pm \frac{1}{2}$ "

## ASTM F679 Gasketed Sewer Pipe

Pipe Size	Outside Diameter (A)	Minimum Wall (B)		*Bell Length (C)	*Insertion/ Reference Mark (D)	Approximate Bell OD Clearance (E)
		PS46	PS115			
18"	18.701"	0.499"	0.671"	9.00"	8.00"	21.750"
21"	22.047"	0.588"	0.791"	10.25"	9.25"	24.750"
24"	24.803"	0.661"	0.889"	11.00"	10.00"	27.750"

\*May vary up to  $\pm \frac{1}{2}$ "

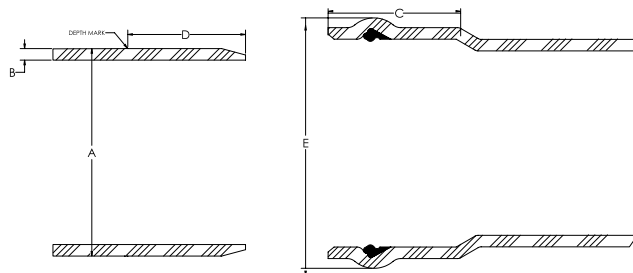

## ASTM 3034 Solvent Weld Sewer Pipe

Pipe Size	Outside Diameter	Minimum Wall SDR35	*Bell Length	Approximate Bell OD Clearance
3"	3.250"	0.093"	3"	3.485"
4"	4.215"	0.120"	4"	4.500"
6"	6.275"	0.180"	5"	6.750"

\*May vary up to  $\pm \frac{1}{2}$ "



## Loading Chart | Sewer

### Gasketed

Pipe Size	Pipe Length	Pieces per Pallet	Feet per Pallet	Pallets per Truck	Feet per Truck
4"	14'	53	742'	30	22,260'
6"	14'	26	364'	24	8,736'
8"	14'	17	238'	24	5,712'
10"	14'	12	168'	18	3,024'
12"	14'	4 / 8	56' / 112'	6 / 18	2,352'
15"	14'	6	84'	18	1,512'
18"	14'	2	28'	30	840'
21"	14'	4	56'	12	672'
24"	14'	4	56'	12	672'

### Solvent Weld

Pipe Size	Pipe Length	Pieces per Pallet	Feet per Pallet	Pallets per Truck	Feet per Truck
3"	10'	84	840'	40	33,600'
4"	10'	53	530'	40	21,200'
	20'	53	1,060'	20	21,200'
6"	10'	26	260'	32	8,320'
	20'	26	520'	16	8,320'